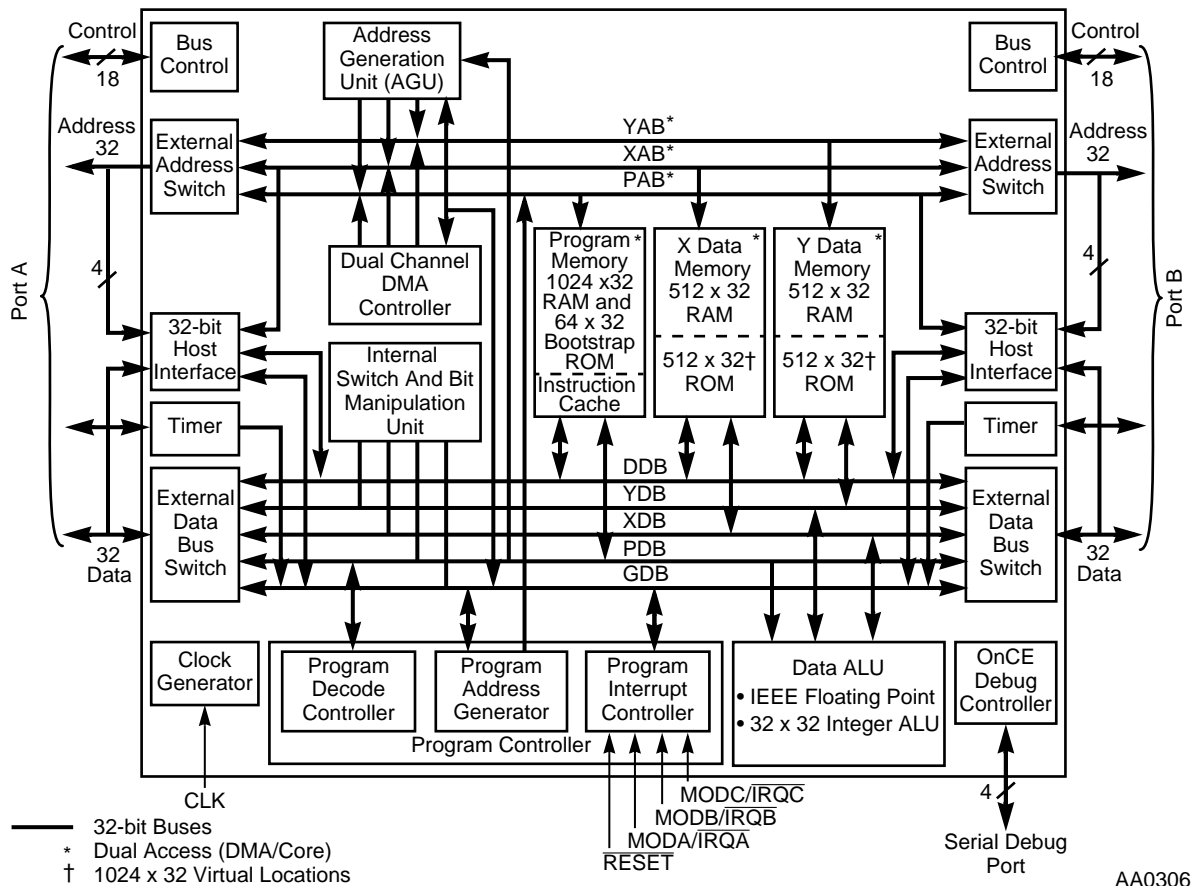


# DSP96002

## 32-BIT IEEE FLOATING-POINT DUAL-PORT DSP

The DSP96002 is a single-chip, dual port, HCMOS, low-power, general purpose IEEE floating-point Digital Signal Processor (DSP) that features 1024 words of data RAM (equally divided into X data and Y data memory), 1024 words of full speed on-chip program RAM, two preprogrammed data ROMs, a dual channel DMA controller, special on-chip bootstrap hardware, and On-Chip Emulation (OnCE™) debug circuitry. The Central Processing Unit (CPU) consists of three 32-bit execution units operating in parallel. The DSP96002 has two identical memory expansion ports with control lines that facilitate interfacing to SRAMs, fast-access DRAMs, and Video RAMs (VRAMs). Each port can be transformed into a Host Interface (HI), which facilitates easy interfacing to other processors for multiprocessor applications. Linear arrays of DSP96002s can be implemented without glue logic. The MPU-style programming model and instruction set allow straightforward generation of efficient, compact code. The high speed of the DSP96002 makes it well-suited for high bandwidth and numerically intensive applications such as graphics, image, and numeric processing.



**Figure 1** DSP96002 Block Diagram

## DSP96002 FEATURES

- Digital signal processing core
  - Efficient 32-bit DSP engine
  - Conforms to IEEE 754-1985 standard for single precision (32-bit) and single extended precision (44-bit) arithmetic
  - Up to 20 million instructions per second (MIPS) at 40 MHz
  - Parallel operation of data ALU, Address Generation Unit (AGU), and program controller within the CPU allow more processing per instruction cycle
  - Single-cycle 32 x 32 bit parallel multiplier
  - Highly parallel instruction set with unique DSP addressing modes
  - Nested hardware DO loops
  - Instruction cache extended to operate as 4K byte (1K word)
  - Fast auto-return interrupts
  - Address buses:
    - One 32-bit unidirectional internal X memory Address Bus (XAB)
    - One 32-bit unidirectional internal Y memory Address Bus (YAB)
    - One 32-bit internal Program Address Bus (PAB)
    - Two 32-bit external address buses
  - Data buses:
    - One 32-bit bidirectional internal X memory Data Bus (XDB)
    - One 32-bit bidirectional internal Y memory Data Bus (YDB)
    - One 32-bit bidirectional internal Global memory Data Bus (GDB)
    - One 32-bit bidirectional internal DMA Data Bus (DDB)
    - One 32-bit bidirectional internal Program Data Bus (PDB)
    - Two 32-bit external data buses
  - MCU-like instruction set mnemonics make programming easier
- Memory
  - On-chip 1024 x 32 bit program RAM
  - Two independent on-chip 512 x 32 bit data RAMs
  - Two independent on-chip 1024 x 32 bit data ROMs (512 x 32 bit virtual memory)
  - On-chip 64 x 32 bit bootstrap ROM

- Off-chip expansion to  $2 \times 2^{32}$  32-bit words of data memory
- Off-chip expansion to  $2^{32}$  32-bit words of program memory
- Miscellaneous features
  - Two expansion ports assignable to X data, Y data, or program memory spaces or a combination thereof, effectively doubling off-chip bus bandwidth.
  - Host interface circuitry on each port provides a flexible slave interface to Direct Memory Access (DMA) controllers and external processors for easy design of multimaster systems
  - Write strobe pins support interface to external SRAMs without additional logic
  - Two programmable timers/counters
  - Three external interrupt/mode control lines
  - One external reset line for hardware reset
  - OnCE 4-pin port for unobtrusive, processor speed-independent debugging
  - HCMOS design for operating frequencies from 40 MHz down to DC
  - 223-pin plastic Pin Grid Array (PGA) package or 240-pin Ceramic Quad Flat Pack (CQFP) package
  - 5.0 V power supply


## PRODUCT DOCUMENTATION

The two manuals listed in **Table 1** are required for a complete description of the DSP96002 and are necessary to properly design with the device. Documentation is available from a local Motorola distributor, a Motorola semiconductor sales office, a Motorola Literature Distribution Center, or through the Motorola DSP home page on the Internet (the source for the latest information).

**Table 1** Additional Documentation

Document Name	Description	Order Number
DSP96002 User's Manual	Detailed description of the DSP96002 core processor and peripherals	DSP96002UM/AD
DSP96002 Data Sheet	Electrical and timing specifications, and pin and package descriptions	DSP96002/D, Rev. 1

# Freescale Semiconductor, Inc.

Motorola and  are registered trademarks of Motorola, Inc.  
OnCE and MBOS are trademarks of Motorola, Inc.



Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typical", must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part.

## How to reach us:

### USA/Europe:

Motorola Literature Distribution  
P.O. Box 20912  
Phoenix, Arizona 85036  
1 (800) 441-2447

### MFAX:

RMFAX0@email.sps.mot.com  
TOUCHTONE (602) 244-6609

### Hong Kong:

Motorola Semiconductors H.K. Ltd.  
8B Tai Ping Industrial Park  
51 Ting Kok Road  
Tai Po, N.T., Hong Kong  
852-2662928

### DSP Helpline:

1 (800) 521-6274  
dsphelp@dsp.sps.mot.com

### Japan:

Nippon Motorola Ltd.  
Tatsumi-SPD-JLDC  
Toshikatsu Otsuki  
6F Seibu-Butsuryu-Center  
3-14-2 Tatsumi Koto-Ku  
Tokyo 135, Japan  
03-3521-8315

### Internet:

<http://www.motorola-dsp.com>



**MOTOROLA**

**For More Information On This Product,  
Go to: [www.freescale.com](http://www.freescale.com)**